

maratodd

L I G H T I N G


FIXTURE TYPE
WOLFGANG SQUARE
FLEX CORD
www.maratodd.com

WOLFGANG

DATE	
ITEM #	MT-WOLFGANG-SQUARE-FLEX CORD
PROJECT	
COMMENTS	
PREPARED BY	

DESCRIPTION

WOLFGANG Square Pendant Light with Flex Cord Suspension Style with Optional Aircraft Cable.

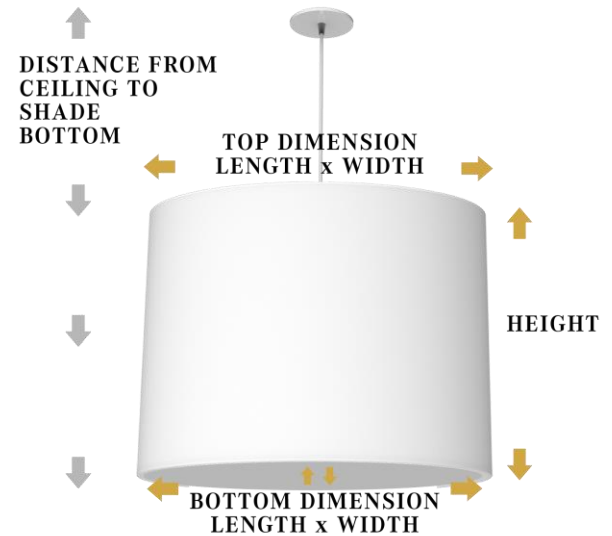

SPECIFICATION FEATURES

MATERIAL / MOUNTING

Cold-rolled steel frame wire body. Matte white acrylic bottom diffuser (Optional).

SHADES

Solid cold-rolled steel construction. Material on heavy translucent white styrene with your choice of the covering's opacity.

FINISH

Standard: White (WHI)
 Premium: Nickel (NIC), Brass (BRA),
 Black (BLA), Ivory (IVO), Oil-Rubbed
 Bronze (ORB)

ACRYLIC DIFFUSER

Our standard acrylic is 7328 White with a thickness of 0.118. Custom colors are available but may impact extended lead time and standard price.

LIGHTING

Standard socket available in multiple configurations. Works with incandescent or LED bulbs.

INSTALLATION

Easy-to-install universal swivel socket to attach to standard 4" junction box. 120V power.
 Cleaning Recommendation: Use a soft cloth brush or a vacuum brush to dust the outside of the lamp shade and a clean soft white flannel cloth for the inside of the lampshade.

OPTIONS

Contact factory for NFP701 Fire Resistant or Stain Guard Fabric coating.

USAGE

Approved for interior locations only.

MODIFICATIONS

Maratodd's skilled craftspeople, with their depth of experience, offer the designer the flexibility to modify standard luminaries for project-specific solutions. Contact the factory regarding scale options, unique finishes, mounting, additional materials/colors or decorative detailing.

ORDERING INFORMATION

Please fill in all **gold highlighted** areas for complete specification.
Pre-selected values in black may also be modified, if required.

WOLFGANG SQUARE FLEX CORD

SERIES

WOLFGANG: Square Pendant Light

18 x 18	10	FC	2		
<u>SHADE TOP DIMENSION</u>	<u>SHADE HEIGHT</u>	<u>SUSPENSION STYLE</u>	<u>SOCKET</u>	<u>BRIGHTNESS</u>	
Even numbers only in inches, minimum 6" with maximum of 84"	Numbers only in inches, minimum 4" with maximum of 40"	FC: Flex Cord Only AC: Aircraft Cable Option		<u>9W</u>	<u>15W</u>
18 x 18			Single	800 Lumens	1,600 Lumens
			Double	1,600 Lumens	3,200 Lumens
		Note:	Triple	2,400 Lumens	4,800 Lumens
		Optional on fixtures up to 38" in diameter	5-Bulb	4,000 Lumens	8,000 Lumens
<u>SHADE BOTTOM DIMENSION</u>		Required on fixtures with diameter of 40"+		<u>COLOR TEMPERATURE</u>	
Even numbers only in inches, minimum 6" with maximum of 84"				2,700K - Warm White	
				3,000K – Soft White	

				A
<u>POWER CORD LENGTH</u>	<u>CANOPY COLOR</u>	<u>LAMPSHADE OPACITY</u>	<u>LAMPSHADE COVERING</u>	<u>DIFFUSER</u>
In inches, up to 192"	STANDARD	OPAQUE:	STANDARD	A: With Acrylic Diffuser
	WHI: White	Features an interior light-blocking layer to make shade opaque.	(Some Examples)	FBD: With Fabric Diffuser
	PREMIUM	(No light passes through the sides of the shade)	L-CRE: Linen Cream L-WHI: Linen White	NA: Without Acrylic Diffuser
<u>POWER CORD COLOR</u>	NIC: Nickel	TRANSLUCENT:	PREMIUM	Note: Fixture Diameters of 40"+ get Diffuser Risers and Finials
STANDARD	BRA: Brass	Shade covering allows some light to shine through. Vertical bars are exposed.	(Some Examples)	
C-BLA: Black	BLA: Black		DL-OFF: Designer Linen Off-White	
C-WHI: White	IVO: Ivory	VERTICAL TRIM:	VC-WHI: Vinyl Coated White	
	ORB: Oil-Rubbed Bronze	1/2" trim applied to shade exterior over vertical support bars to hide shadows.		