


maratodd

L I G H T I N G

FIXTURE TYPE
CHARITY DRUM FLEX CORD
www.maratodd.com

CHARITY

DATE	
ITEM #	Drum Pendant Light with Flex Cord
PROJECT	
COMMENTS	
PREPARED BY	

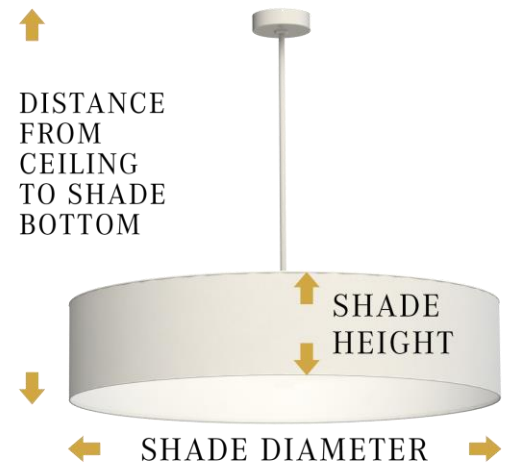

DESCRIPTION

Drum Pendant Light with Flex Cord Suspension Style.

SPECIFICATION FEATURES

MATERIAL / MOUNTING

Cold-rolled steel frame wire body. Matte white acrylic bottom diffuser (Optional).

SHADES

Solid cold-rolled steel construction. Material on heavy translucent white styrene with your choice of the covering's opacity.

FINISH

Standard: White (WHI)
Premium: Nickel (NIC), Brass (BRA), Black (BLA), Ivory (IVO), Oil-Rubbed Bronze (ORB)

ACRYLIC DIFFUSER

Our standard acrylic is 7328 White with a thickness of 0.118. Custom colors are available but may impact extended lead time and standard price.

LIGHTING

Standard socket available in multiple configurations. Works with incandescent or LED bulbs.

INSTALLATION

Easy-to-install universal swivel socket to attach to standard 4" junction box. 120V power.

Cleaning Recommendation: Use a soft cloth brush or a vacuum brush to dust the outside of the lamp shade and a clean soft white flannel cloth for the inside of the lampshade.

OPTIONS

Contact factory for NFP701 Fire Resistant or Stain Guard Fabric coating.

USAGE

Approved for interior locations only.

MODIFICATIONS

Maratodd's skilled craftspeople, with their depth of experience, offer the designer the flexibility to modify standard luminaries for project-specific solutions. Contact the factory regarding scale options, unique finishes, mounting, additional materials/colors or decorative detailing.

ORDERING INFORMATION

Please fill in all **gold highlighted** areas for complete specification.
Pre-selected values in black may also be modified, if required.

CHARITY DRUM FLEX CORD

SERIES

CHARITY Round Drum Pendant Light

30	10	FC	3		
<u>TOP + BOTTOM DIAMETER</u>	<u>SHADE HEIGHT</u>	<u>SUSPENSION STYLE</u>	<u>SOCKET</u>	<u>BRIGHTNESS</u>	
Even numbers only in inches, minimum 6" with maximum of 84"	Even numbers only in inches, minimum 4" with maximum of 48"	FC : Flex Cord		<u>9W</u>	<u>15W</u>
			Single	800 Lumens	1,600 Lumens
			Double	1,600 Lumens	3,200 Lumens
			Triple	2,400 Lumens	4,800 Lumens
			5-Bulb	4,000 Lumens	8,000 Lumens
				<u>COLOR TEMPERATURE</u>	
				2,700K - Warm White	
				3,000K – Soft White	
				A	
<u>CORD LENGTH</u>	<u>CORD COLOR</u>	<u>LAMPSHADE OPACITY</u>	<u>LAMPSHADE COVERING</u>	<u>DIFFUSER</u>	
In inches, up to 192"	3/8" Round Steel				
	STANDARD	OPAQUE:	STANDARD	A: With Acrylic	
	ST-WHI: White	Features an interior light-blocking layer to make shade opaque. (No light passes through the sides of the shade)	(Some Examples)	Diffuser	
	PREMIUM		L-CRE: Linen Cream	FBD: With Fabric	
	ST-NIC: Nickel		L-WHI: Linen White	Diffuser	
	ST-BRA: Brass			NA: Without Acrylic	
	ST-BLA: Black		PREMIUM	Diffuser	
	ST-IVO: Ivory		(Some Examples)	Note: Fixture	
	ST-ORB: Oil-Rubbed Bronze	TRANSLUCENT:	DL-OFF: Designer	Diameters of 40" + get	
		Shade covering allows some light to shine through. Vertical bars are exposed.	Linen Off-White	Diffuser Risers and	
	<u>CANOPY COLOR</u>		VC-WHI: Vinyl Coated White	Finials	
	STANDARD				
	WHI: White	VERTICAL TRIM:			
	PREMIUM	1/2" trim applied to shade exterior over vertical support bars to hide shadows.			
	NIC: Nickel				
	BRA: Brass				
	BLA: Black				
	IVO: Ivory				
	ORB: Oil-Rubbed Bronze				